



21 m Working height

14 m Range to the side

Continuous rotation

Flexible telescope boom
with additional cage arm




Rudi21


Equipment




TSR boom system



V-Outriggers



Automatic levelling



Telescopic winch



Energy supply



Working platform with cage arm



Platform control



Drive concept



Full panelling



Basket control station



Continuous rotation




Remote control from below (opt.)

Technical specifications

Working height	21 m
Range to the rear	15 m
Range to the side	14 m
each with 250 kg basket load	
Swivel range	endlessly rotatable
Work basket angle of rotation	180°
Basket capacity	250 kg
Large work basket	1.4 m x 0.7 m
Outrigger width (min.)	at the front 2.4 m
	at the back 2.4 m
Outrigger width (max.)	at the front 4.5 m
	at the back 4.25 m
Total weight** (min.)	3.5 t
Clearance height	3.0 m

*dependent on truck type

Working Range Diagram*

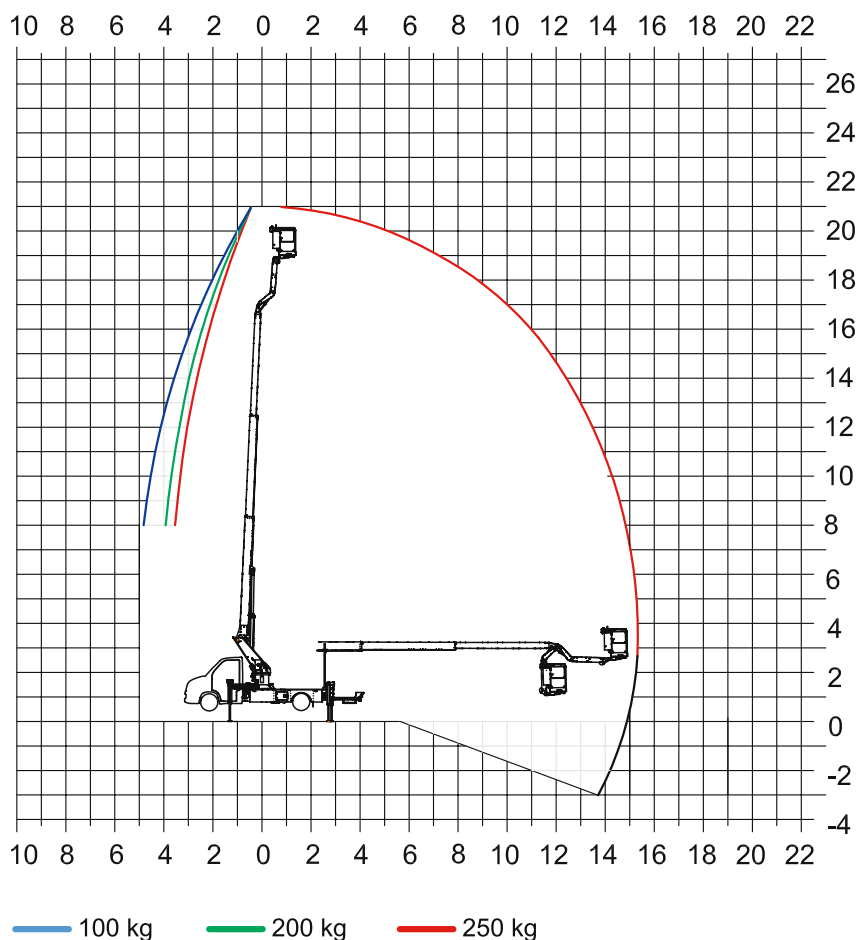

Klaas

KLAAS Service- & Vertriebs GmbH

Raiffeisenstraße 26 · D-59387 Ascheberg

Tel.: +49 (0) 2593-95 92-0

Fax: +49 (0) 2593-95 92-15

info@klaas.com

klaas.com

Subject to technical changes. All dimensions are approximate. The right is reserved to alter the functions and performance. The information reflects the appliance performance at the time of publication.